

FURNATEMP® CANDY HEATERS & COIL ON TUBE HEATERS



FURNATEMP® Candy Heaters are one/single end Terminal Heaters.

FURNATEMP® Coil on Tube Heaters are double end Terminal Heaters.

These heater consists of specially designed round shaped high temperature ceramic tubes that hold the heating elements. It is designed for long life and maintenance free operation. The hot zone and cold zone lengths can be adjusted as per the specific requirement. Due to innovative design, it will deliver a much higher power than conventional heaters. A special ceramic top layer coating helps to avoid element bunching and low maintenance. Furnatemp candy / coil on tube Heaters can be used only in horizontal application. Heating alloy used in these Heaters are either NiCr alloy or FeCrAl alloy.

POWER DELIVERY

These heaters can be designed with a higher power compared with conventional heaters. Its strong heating ability and high efficiency guarantee outstanding results in various applications.

ADVANTAGES


- Maintenance Friendly
- Custom Built & Standard Design
- Higher productivity & Timely Delivery

APPLICATIONS


- Heat treatment Furnaces & Automobile Industries
- Aluminum annealing & Melting
- Salt bath Furnaces & Hot air ovens
- Roller Hearth / continuous Furnaces
- Heating cassettes
- All type of Electrical Heat Treatment Furnaces & ovens

TECHNICAL SPECIFICATIONS

Wattage/Power	0.5KW to 100KW
Heating Element	FeCrAl alloy or NiCr alloy
Ceramic Refractory	Round shaped ceramic tubes. Standard Diameter 10mm to 200mm & Custom Built. Length upto 3500mm
Cold zone Insulation	Furnatemp Insulation Board & Ceramic fiber Blanket
Terminal connector	Brass connector & Flexible Aluminum Birded

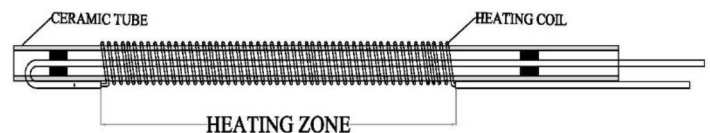

Candy Heater (Single/one end Terminal)

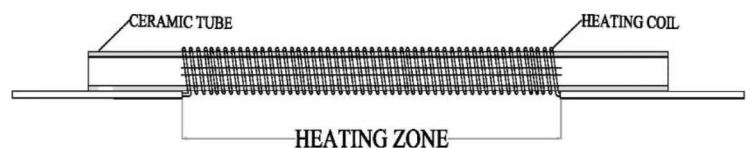

Coil on tube (Double end Terminal)



FURNATEMP METALIC HEATING ELEMENT DATA

	Fe-Cr-Al Heating Element				Ni-Cr Heating Element	
	FURNA -T1		FURNA-TPM		FURNA-NiCr80	
Standard chemical Components (%)	Al	6.0	Al	6.0	Cr	19-21
	Cr	23	Cr	23	Fe	1 or less
	Fe	Remaining	Fe	Remaining	Ni	77 or more
	Other elements in small quantity					
Max. duty temp. of Heating Elements (°C)	1400		1420		1100	
Electric resistivity 20 °C (μΩ-m)	1.45 ± 5%		1.45 ± 5%		1.08 ± 5%	
Expansion from thermal Factor (for various temperature range)	15.1×10 ⁻⁶ [20°C - 1000°C (°C ⁻¹)]		14.8×10 ⁻⁶ [20°C - 1000°C (°C ⁻¹)]		17.6×10 ⁻⁶ [20°C - 1000°C (°C ⁻¹)]	
			15.9×10 ⁻⁶ [20°C - 1400°C (°C ⁻¹)]			
Yield strength MPa	300-600		300-600		200-600	
Hardness (Hv)	200-240		200-240		150-190	
Melting Point (°C)	1500		1500		1400	
Electric resistance temperature coefficient	33×10 ⁻⁶		15×10 ⁻⁶		58×10 ⁻⁶	
Increase from Oxidation 1,200°C (mg/cm² h)	0.05		0.05		0.25 or less	
Tensile strength	MPa		650-900	650-900	700-900	
	(kgf/mm²)		(65-90)	(65-90)	(70-90)	
Specific Gravity	7.1		7.1		8.4	
Elongation (%)	15-25		15-25		20 or more	
Emissivity - fully oxidized material	0.70		0.70		0.88	
Max operating temperature in air (°C)	1250		1250		1100	
Magnetic Properties	Magnetic		Magnetic		Non- Magnetic	
Recommended Surface loading (W/cm²) (for various temperature range)	Max. 5 W/cm² [100- 500 °C]		Max. 6 W/cm² [100- 500 °C]		Max. 5 W/cm² [100- 500 °C]	
	Max. 3 W/cm² [500- 800 °C]		Max. 3.5 W/cm² [500- 800 °C]		Max. 3 W/cm² [500- 800 °C]	
	Max. 2.5 W/cm² [800- 1050 °C]		Max. 3 W/cm² [800- 1050 °C]		Max. 2 W/cm² [800- 1100 °C]	
	Max. 1.5 W/cm² [1050- 1250 °C]		Max. 2 W/cm² [1050- 1250 °C]			

Temperature factor of resistivity of **FURNA-T1 & FURNA -TPM**

Multiply the resistance at the normal temperature by the coefficient [Ct] shown below to obtain the resistance at working temperatures.

Temp. °C	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
Ct	1.00	1.00	1.00	1.01	1.01	1.02	1.02	1.03	1.03	1.04	1.04	1.04	1.04	1.04


Specific heat capacity of **FURNA-T1 & FURNA -TPM**

Temp °C	20	200	400	600	800	1000	1200	1400
kJ kg ⁻¹ K ⁻¹	0.46	0.56	0.63	0.75	0.71	0.72	0.74	0.80

Thermal conductivity of **FURNA-T1 & FURNA -TPM**

Temp °C	50	600	800	1000	1200	1400
W m ⁻¹ K ⁻¹	11	20	22	26	27	35

High temperature Deformation resistance graph for different Temperature & Grade

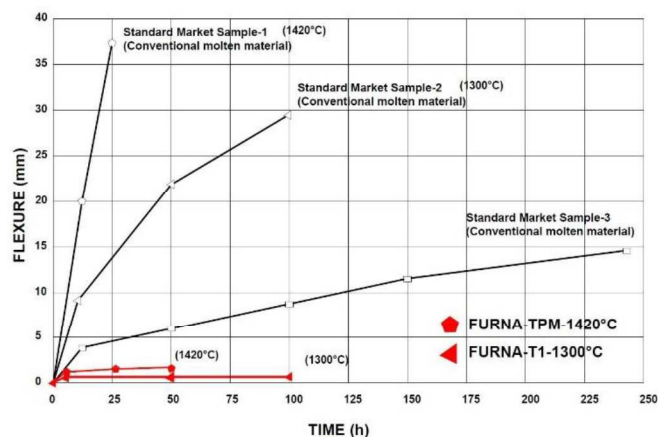


FURNATEMP

ISO 9001-2015 COMPANY

The Heat with Solutions

www.furnatemp.com

FURNATEMP GALLERY

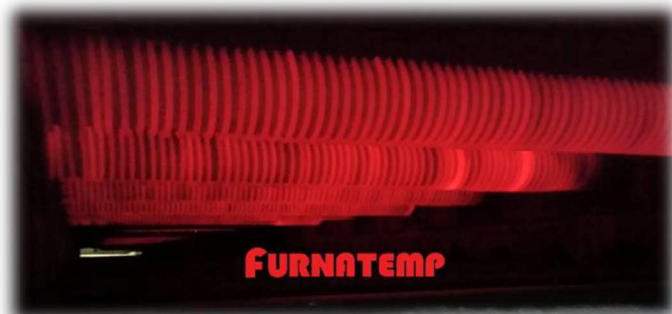

FURNATEMP METATEK INDIA PRIVATE LIMITED

302/3-5, Seetharam Industrial Estate, V.P.Road,
Jalahalli Village, Bangalore-560013, Karnataka, India.
GSTIN: 29AAFCF5214K1ZH, CIN: U28150KA2023PTC175221

Website: www.furnatemp.com

Mail Id: furnatemp@gmail.com

sales@furnatemp.com

Phone No: 080-28382664